


Portable Dispensing Unit


Installation Instructions

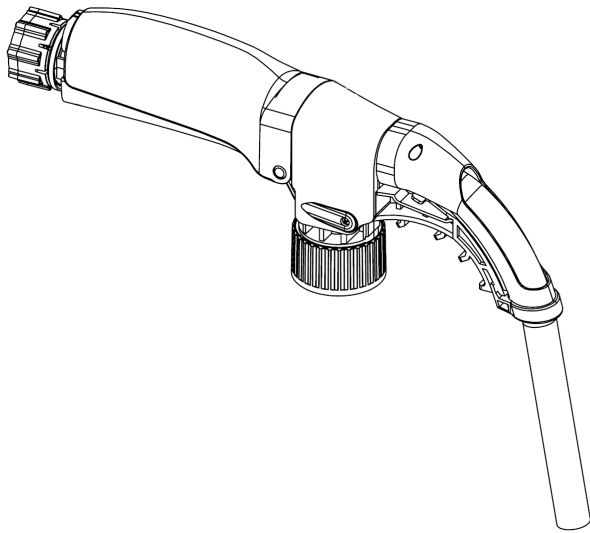

Overview

The Portable Dispensing Unit dispenser system is designed to make cleaning easier, more effective and safer. Combining the proven closed loop technology with application versatility you have the next generation in dispensing systems in front of you.

I-1101

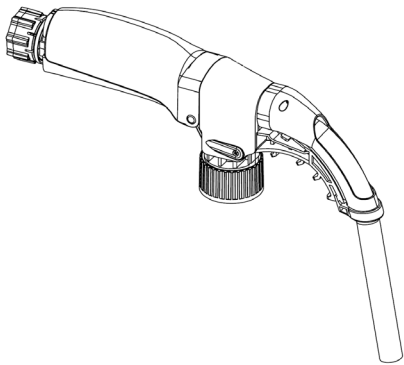

Package Contains:
Instruction sheet
Portable Dispensing Unit

Suggested Tools:
None Required

Table of Contents

Package Contents / Suggested Tools	1
Operational Requirements	2
Warnings	2
Setup & Operation	2
Warranty Information	3

Operational Requirements

Operational Pressure Range (psi): 20-90*

Operational Temperature Range (°F): 40-120*

** Recommended water pressure is between 20 psi (1.38 bar) and 80 psi. (5.52 bar). If pressure exceeds 80 psi, it is recommended that a 60.18 regulator is used.

Warnings



All installations must conform to local plumbing codes and use approved backflow prevention devices. A pressure indicating tee is to be installed with existing faucets according to local plumbing codes in the state of Wisconsin and any other state that requires the use of a pressure indicating tee



ALWAYS WEAR PROTECTIVE CLOTHING AND EYEWEAR WHEN WORKING WITH CHEMICAL PRODUCTS

Set-Up and Operation

Basic Operation:

1. Connect Portable Dispensing unit to your chemical container. Connect the dispenser to the chemical container by screwing the cap (clockwise) onto the bottle. Forcefully connecting the dispenser to a chemical container not designed specific to work with this system may damage the dispenser.
2. Connect Portable Dispensing Unit to a water line. The unit is equipped with a standard water supply thread connection. Turn on water supply.
3. Squeeze handle trigger to dispense ready to use solution. For extended use, you can engage the red lock ring on the back of the unit by rotating it 'up' into the lock position.
4. To stop using the unit, rotate the red lock ring 'down' (if applied) and release the trigger. Chemical mixture will run out of the unit for a brief moment after trigger release.
5. Disconnect from water source when not in use.

Changing Chemical Fill Bottles:

1. While you do not have to shut off the water source when changing out the chemical containers, it is **IMPORTANT** that the trigger is not engaged (squeezed) when switching containers.
2. To remove the bottle, unscrew (counterclockwise) the threaded cap on the dispenser until the dispensing unit and bottle separate.
3. Connect the dispenser to the chemical container by screwing the cap (clockwise) onto the container. System is ready to dispense product.

Warranty

Merchandise Returns

No merchandise will be returned for credit without manufacturer's written permission. Please contact your dealer for warranty issues.

Product Warranty

Manufacturer's products are warranted against defective material and workmanship under normal use and service for one year from the date of manufacture. This limited warranty does not apply to any products that have a normal life shorter than one year or failure and damage caused by chemicals, corrosion, physical abuse, or misapplication. Rubber and synthetic rubber parts such as "O"-rings, diaphragms, PVC tubing, and gaskets are considered expendable and are not covered under warranty. This warranty is extended only to the original buyer of manufacturer products. If products are altered or repaired without prior approval of manufacturer, this warranty is void.

Defective units or parts should be returned to the factory with transportation prepaid. If inspection shows them to be defective, they will be repaired or replaced without charge, F.O.B. factory. manufacturer assumes no liability for damages. Return merchandise authorization number must be granted in advance of returned units for repair or replacement (See "Merchandise Returns" above).