




Industrial Degreaser Dispensing Systems

If **REVITEFUSION** is not for you, we have two other industrial solutions

The High Flow Single Dispensing System and Float Valve System are unique systems that offer dilution accuracy with a wealth of benefits. These space saving systems take a degreaser and turn it into a ready to use product that is powerful enough for any job. The cost savings, smaller carbon footprints, and operational efficiency provides users with a choice when it comes to meeting their specific operational needs. Both systems are solution-based and have something for everyone, making it possible for users to pick the right product for their individual needs.

HIGH FLOW SINGLE DISPENSING SYSTEM



Features

- Closed Loop System
- Dilution Accuracy
- Low Foaming System
- Built in Flash Corrosion Inhibitor
- Easy On/Off Knob
- Compact System
- Easy Connection to Water Supply
- Back Flow Protection
- Stainless Steel Cover

Benefits

- High Flow Rate of 10 GPM
- Less Packaging
- Reduced Freight Costs
- Less Waste (Reduce Carbon Footprint)
- Utilizes Less Space

Stock Code# 120084

METERING TIPS	1 CPS		
	COLOR	OZ./GAL.	RATIO
	Clear	0.21	606.3 - 1
	Purple	0.26	496.9 - 1
	Yellow	0.44	288.6 - 1
	Green	0.83	155.0 - 1
	Pink	0.95	134.1 - 1
	Turquoise	1.57	81.6 - 1
	Black	2.01	63.6 - 1
	Gray	2.64	48.4 - 1
	Red	3.40	37.7 - 1
	Blue	4.11	31.1 - 1
	Brown	5.64	22.7 - 1
	White	7.19	17.8 - 1
	Orange	8.71	14.7 - 1
	No Tip	14.88	8.6 - 1


Induction rates may vary from product to product

NOTE: In order for unit to operate properly, flow rate needs to be 10 GPM or greater.



Industrial Degreaser Dispensing Systems

FLOAT VALVE SYSTEM

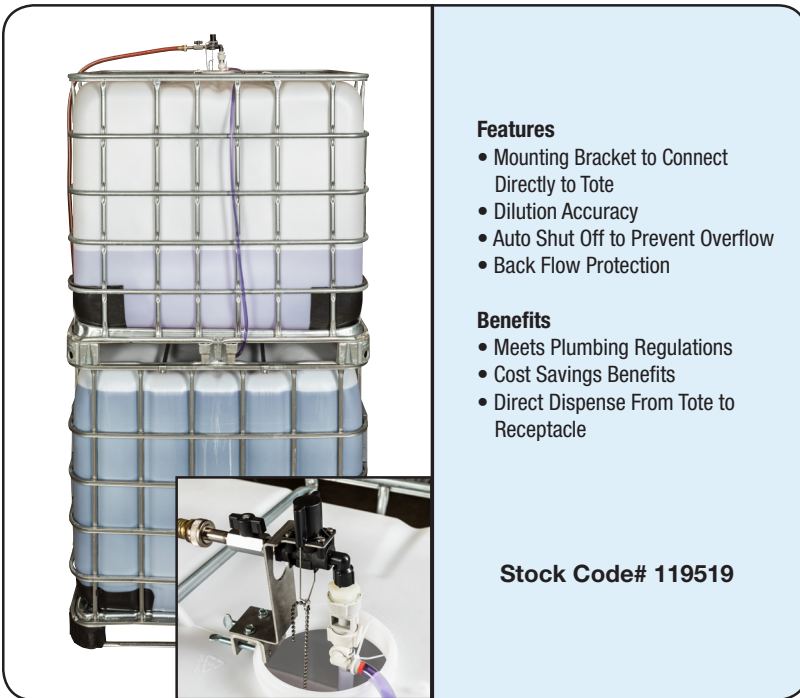

Features

- Mounting Bracket to Connect Directly to Tote
- Dilution Accuracy
- Auto Shut Off to Prevent Overflow
- Back Flow Protection

Benefits

- Meets Plumbing Regulations
- Cost Savings Benefits
- Direct Dispense From Tote to Receptacle

Stock Code# 119519

METERING TIPS	1 CPS	
	OZ./GAL.	RATIO
Clear	0.30	430 - 1
Purple	0.48	265 - 1
Yellow	1.28	100 - 1
Green	1.67	77 - 1
Pink	2.36	54 - 1
Turquoise	3.76	34 - 1
Black	4.47	29 - 1
Gray	5.53	23 - 1
Red	7.00	18 - 1
Blue	8.78	15 - 1
Brown	10.95	12 - 1
White	14.19	9 - 1
Orange	17.58	7 - 1
No Tip	33.15	4 - 1

Induction rates may vary from product to product

NOTE: Minimum water pressure of 15 psi is required.

**Additional
Tote Tapping Parts**
(valve, pipe, hose)

Stock Code# 120085



*Call our experienced sales team to
start building your system today!*

1048 Stinson Drive
Reading, PA 19605
Phone: 1-800-548-4568
Fax: 610.926.1194
miscoproducts.com